

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____ Date _____ Contractor _____
 Model Specified _____ Qty _____ Approved By _____
 Designer/Engineer _____ Date _____ Contractor's PO # _____
 Submitted by _____ Date _____ Other _____

Webstone Co. Inc.
 Tel: (800) 225-9529
 Fax: (800) 336-5133
 www.webstonevalves.com



Webstone
 Company, Inc.


The Only Way to Install Any Tankless Water Heater

40443(SET) 40653(HOT), 40663(COLD)


FULL PORT FORGED BRASS TANKLESS WATER HEATER ISOLATION VALVES
IPS UNION x IPS x IPS x HOSE (HOT)
IPS UNION x IPS x HOSE (COLD)
(600 WOG) - ISO 9001



1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	BRASS (ASTM B283-C37700)
3.	SEATS (4)	TEFLON® (PTFE)
4.	BALL (2)	BRASS/HARD CHROME PLATE
5.	STEM (2)	BRASS (ASTM B124-C37700)
6.	STEM SEAL (2)	TEFLON® (PTFE)
7.	PACKING GLAND (2)	BRASS (ASTM B124-C37700)
8.	HANDLE	SS 304
9.	HANDLE NUT	SS 304
10.	HANDLE JACKET	VINYL GRIP
11.	LOCK WASHER	SS 304
12.	UNION WASHER	NITRATE BUTADIENE (NBR)
13.	INSULATOR	ABS
14.	UNION NUT	BRASS (ASTM B124-C37700)
15.	UNION FITTING	BRASS (ASTM B124-C37700)
16.	RETAINING SEATS (2)	TEFLON® (PTFE)
17.	DRAIN VALVE HANDLE	ENAMEL COATED ALUMINUM
18.	DRAIN VALVE HANDLE SCREW	BRASS (ASTM B124-C37700)
19.	RETAINING NUT	FORGED BRASS (ASTM B283-C37700)
20.	CAP AND CHAIN	BRASS (ASTM B124-C37700) w/NBR HOSE WASHER

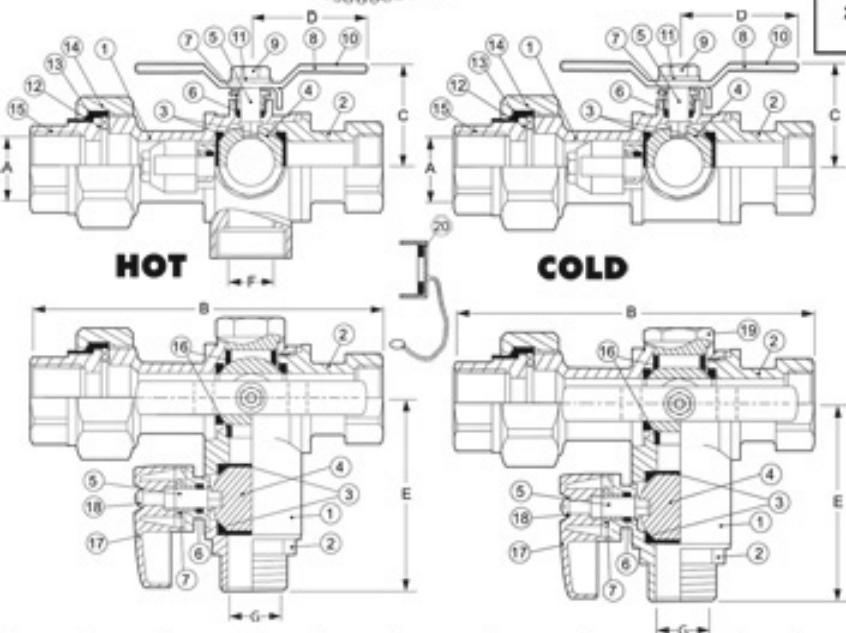

Includes Pressure Relief Valve Options



PRESSURE RATING
 600 WOG non-shock

1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1.20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9002 Facility

Easy - Easy two step install of your tankless water heater with unsurpassed safety, features and benefits.
Xtra - Extra features like a full port for full flow throughout the valves including a full port for purging, flushing and testing the system.

Protection - Protection for the life of your system. Emergencies are handled with quick quarter turn ball valve shutoffs for total isolation of your system in seconds.

ITEM	SIZE	CTN/CS	A	B	C	D	E	F	G
40443	3/4	1/8	3/4	4 15/16	1 1/2	1 13/16	3	3/4	3/4
40653	3/4	1/20	3/4	4 15/16	1 1/2	1 13/16	2 7/8	3/4	3/4
40663	3/4	1/20	3/4	4 15/16	1 1/2	1 13/16	2 7/8	-	3/4
40444	1	1/8	1	5 3/8	2 1/8	2	3 5/16	3/4	3/4
40654	1	1/20	1	5 3/8	2 1/8	2	3 5/16	3/4	3/4
40664	1	1/20	1	5 3/8	2 1/8	2	3 5/16	-	3/4

Webstone product specifications in U.S. customary units are approximate and are provided for reference only. For precise measurements, please contact Webstone Technical Service. Webstone reserves the right to change or modify product design, construction, specifications or materials without prior notice and without incurring any obligation to make such changes and modifications on Webstone products previously or subsequently sold. Teflon® is a registered trademark of DUPONT. The Isolator® is a registered trademark of Webstone Company, Inc.